

Neon Mini


Proven and validated by Domino Sign, the Neon Mini offers the best guarantees in terms of LED quality, envelope and colour rendering thanks to its anti-UV treatment.

Express your creativity thanks to the Neon Mini that can be cut every 1.04 cm.

The soldered electrical connection method ensures a durable solution.

A system of 5 types of end caps guarantees the watertightness and mechanical strength of all connections.

- Homogeneous luminous flux (120 LED/m)
- 140° angle
- IP 67 (waterproof)
- Available in 8 colours
- Can be cut every 1.04 cm
- 4 year warranty

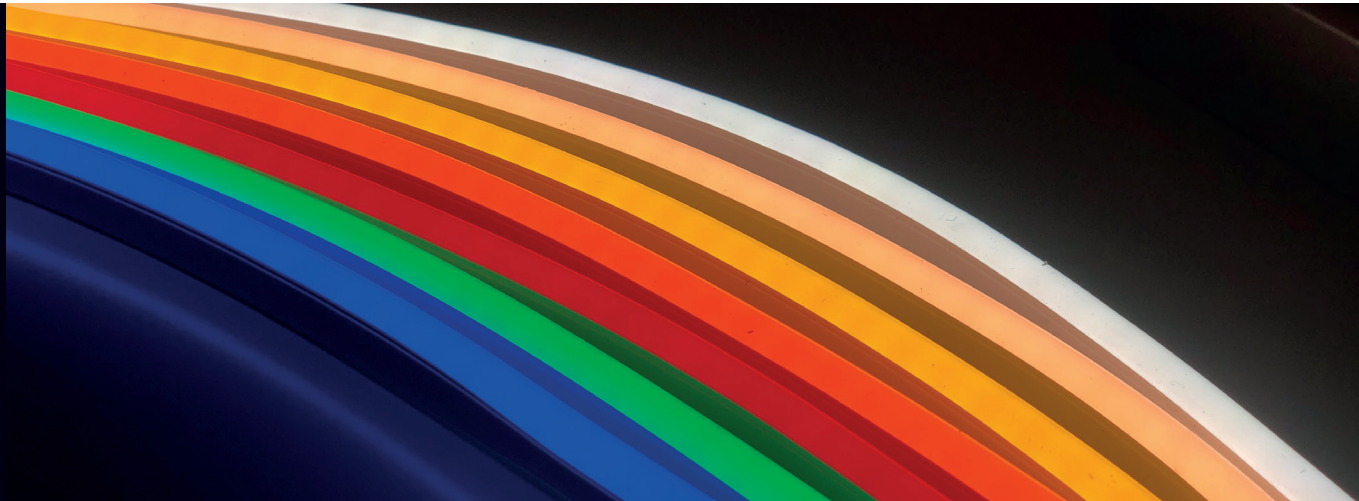

Neon Mini

12 V

140°

IP 67

Ta 40° (min -20°/max +60°)

Neon Mini								
	White 6500 K	Warm White 2500 K	jaune 573 nm	Orange 605 nm	Red 615,5 nm	Blue 464 nm	Green 521 nm	Pink pantone 233u
Luminous flux (Lm/m)	284	280	62	86	36	39	138	49
Power consumption (W/m)	12	12	12	12	12	12	12	12
Animation	yes							
Dimmer	yes							

Packaging - Warranty

Packaging: 5 m reel
Lifetime: 40,000 hours
Warranty: 4 years for 8 to 10 hours
8 to 10 hours per day

Silicone end caps

A
direct output
B
low output
C
no output
D
left output
E
right output

