

Néon Mini

Proven and validated by Domino Sign, Neon Mini offers the best guarantees in terms of LED quality, envelope and colour rendering thanks to its anti-UV treatment.


Express your creativity with the Mini Neon divisible every 1.04 cm.

The electrical connection mode by soldering ensures a durable solution.

A system of 5 types of end caps guarantees the tightness and mechanical resistance of all connections.



- Homogeneous luminous flux (120 led/m)
- 140° angle
- IP 67 (waterproof)
- Available in 7 colours
- Divisible every 1.04 cm
- 4-year warranty

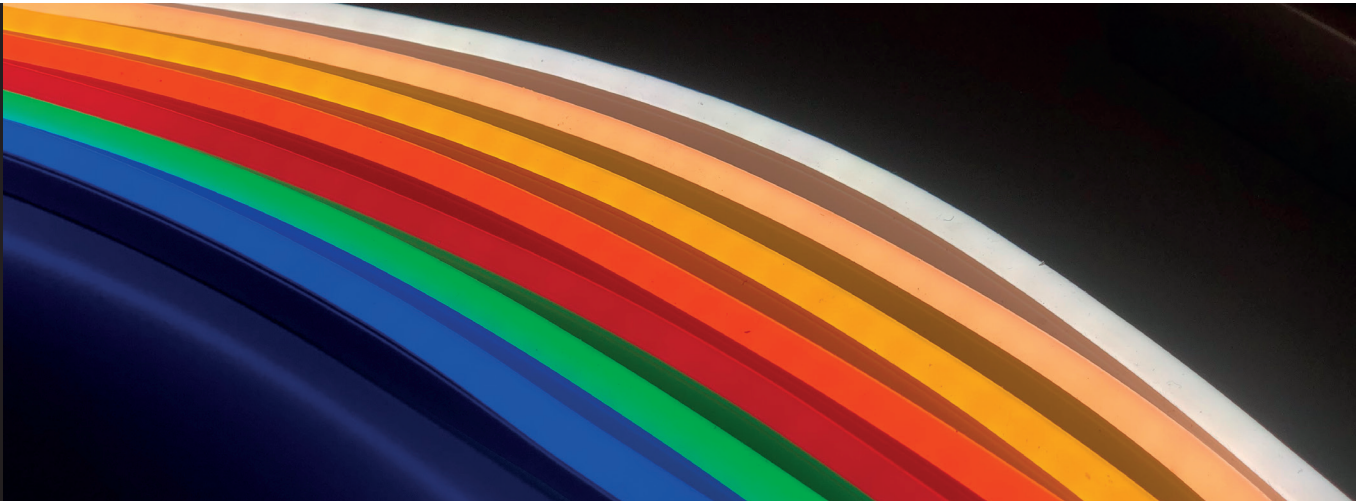

Néon Mini



Néon Mini								
	blanc / white 6500 K	blanc chaud / warm white 2500 K	jaune / yellow 573 nm	orange / orange 605 nm	rouge / red 615,5 nm	bleu / blue 464 nm	vert / green 521 nm	rose / pink pantone 233u
Flux lumineux / Luminous flux (lm/m)	284	280	62	86	36	39	138	49
Consommation / Consumption (W/m)	12	12	12	12	12	12	12	12
Animateur / Animation	oui / yes							
Gradateur / Dimmer	oui / yes							





Packaging - Warranty

Packaging: 5 m reel

Service life: 40,000 hours

Warranty: 4 years for use
from 8 to 10 hours a day

Embouts en silicone

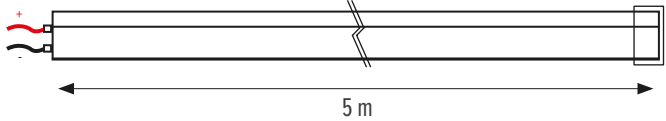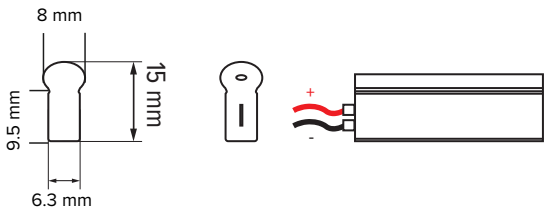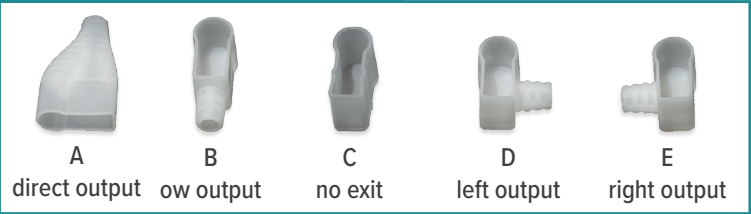

Maximum 5 m en série / Maximum 5 m in serial

